


PLAN VIEW

SECTION VIEW

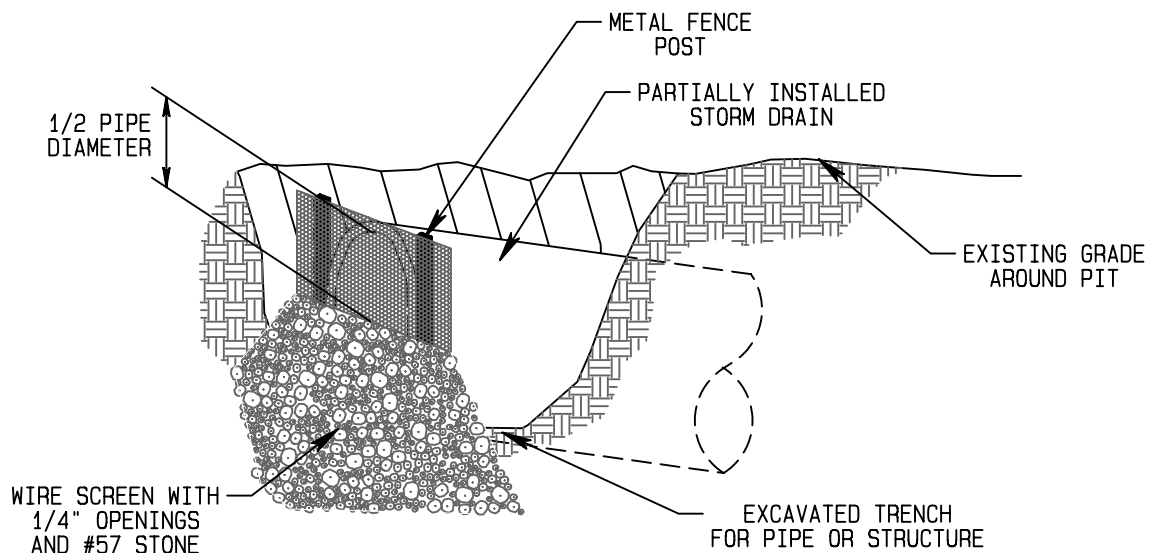

ISOMETRIC VIEW

NOTES:

1. THIS MEASURE IS BEST USED WHERE STORM DRAIN TIES INTO EXISTING STORM DRAIN SYSTEM AND FLOWS OFFSITE UNTREATED.
2. THE OVER FLOW NOT COVERED BY #57 STONE SHALL BE APPROX. 1/2 OF THE PIPE DIAMETER.
3. ATTACH WIRE SCREEN TO METAL FENCE POST ON EACH SIDE OF PIPE.

C I T Y O F G R E E N S B O R O

PARTIALLY INSTALLED STORM SEWER PROTECTION

STD. NO.

443

REV.

06-05